

SpectrAlert™ SP2C Series Ceiling Mount Speaker/Strobes



Models Available

Speaker/Strobe Models

SP2C2415
SP2C241575
SP2C2430
SP2C2475
SP2C2495
SP2C24177

Accessory Back Box Skirt

BBSCW



Product Overview

Combines SpectrAlert ceiling mount strobe and speaker technology

- Low current draw
- Fidelity sound quality

24 volt models available with 15, 15/75, 30, 75, 95, and 177 candela strobes

25.0 and 70.7 volt speaker with four field-selectable power taps

Ceiling-specific shape, profile, and aesthetics

Strobe is synchronizable with MDL Sync•Circuit module

Mounts to 4x4x2-1/8 back box without an extension ring

Round shape offers greater placement flexibility

Engineering Specifications

System Sensor's SpectrAlert SP2C series ceiling speaker/strobes represent the combination of leading-edge strobe and speaker technology with a design specifically intended for ceiling mount applications.

Technology. SpectrAlert SP2C ceiling speaker/strobes combine the low current draw of the ceiling mount SpectrAlert strobes, with the intelligible, fidelity sound quality of the SpectrAlert SP200 series evacuation speaker.

Flexibility. Like all SpectrAlert products, the SP2C series ceiling speaker/strobes feature the flexibility to meet a wide variety of applications. The 24 volt strobe is available in six different candelas, including 177 candela for sleeping areas. The speaker offers field-selectable 25.0/70.7 voltage and 1/4, 1/2, 1, and 2 watt power taps.

Aesthetics. The SP2C ceiling speaker/strobes offer a design that is sensitive to the aesthetic demands of ceiling mount applications. The round shape maintains a low profile appearance, similar to that of a smoke detector. Its stylish curves and design further refine the aesthetics over other generic wall/ceiling mount designs. Yet SpectrAlert's round shape provides clearly visible "FIRE" identification from all angles.

Installation. The SP2C ceiling speaker/strobes include several features to simplify installation. By incorporating the SP200 series speaker, the entire unit may be mounted to a standard 4x4x2-1/8 back box, without the need for an extension ring. An optional back box skirt is also available for surface-mount applications. And with SpectrAlert's round shape, it is not necessary to align the back box with the room's walls. SpectrAlert always lines up.

Ceiling speaker/strobe shall be a System Sensor Model _____ listed to UL1480 and UL 1971 and be approved for fire protective signaling systems. Speaker shall be capable of operating at 25.0 or 70.7 nominal Vrms, and shall have a frequency range of 400 to 4000 Hz. Speaker shall have power taps which are selected by shunts. The strobe shall comply with the NFPA72 requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system.



General Specifications

Dimensions

6.8" diameter

Mounting

4"x4"x2-1/8" back box

Indoor Operating Temperature

32° to 120° F (0° to 49°C)

Strobe Specifications

Strobe Operating Voltage

24 VDC and FWR unfiltered

Operating Voltage Range

24V, 16-33 V

Input Terminals

12 to 18 AWG

Operating Voltage Range w/Sync•Circuit Module

24V, 17-33V

Speaker Specifications

Input Voltage

25.0 or 70.7 Vrms (nominal)

Input Terminals

12 to 18 AWG

Sound Output (UL Reverberent dBA @ 10 ft.)*

2 watts	1 watt	1/2 watt	1/4 watt
84	81	78	75

Frequency Range

400-4000 Hz


Power Taps

1/4, 1/2, 1 and 2 watts

Sound Output (UL Anechoic) dBA @ 10 ft.)

2 watts	1 watt	1/2 watt	1/4 watt
87	84	81	78

SpectrAlert Mounting Diagrams

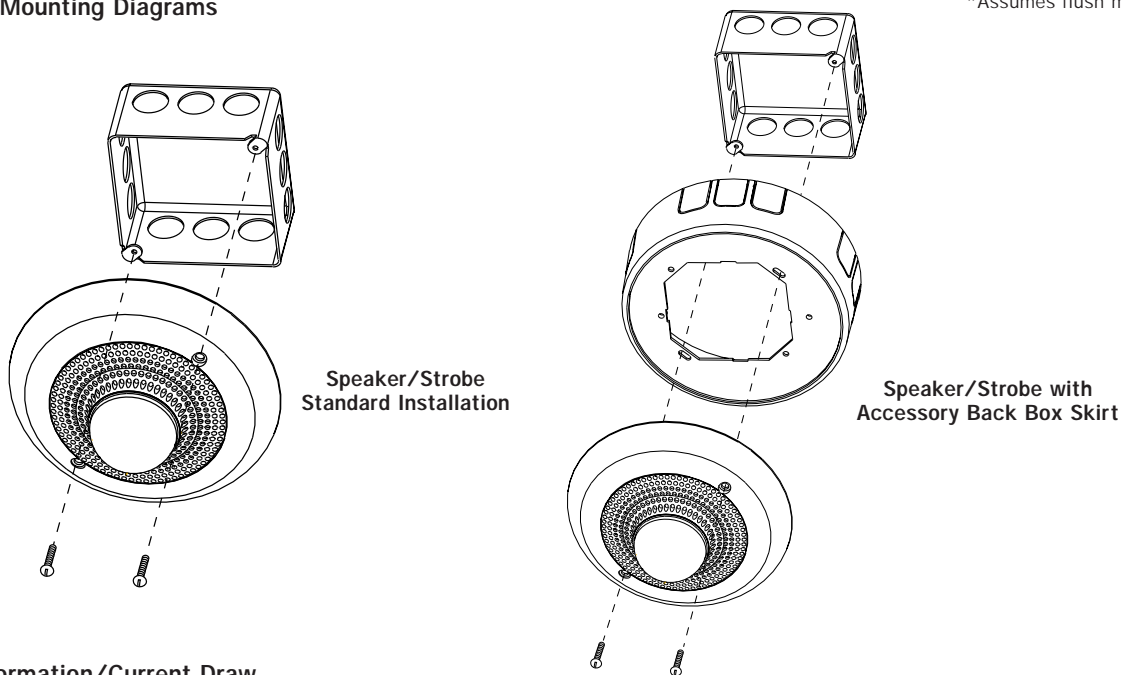

Ordering Information/Current Draw

	Model No. (White)	Candela	Avg. Current (mA) @24 V		Peak Current (mA) @24 V		In Rush Current (mA) @ 24 V	
			DC	FWR	DC	FWR	DC	FWR
Ceiling Speaker/ Strobes	SP2C2415	15	48	55	170	242	133	177
	SP2C241575	15/75	56	62	172	258	134	179
	SP2C2430	30	68	79	226	318	137	179
	SP2C2475	75	127	140	398	462	133	177
	SP2C2495	95	153	173	534	560	132	176
	SP2C24177	177	TBD	TBD	TBD	TBD	TBD	TBD
Surface-mount back box skirt	BBSCW	-	-	-	-	-	-	-
Sync•Circuit Module	MDLW	-	16	24	-	-	-	-

System Sensor Sales and Service

System Sensor Headquarters

3825 Ohio Avenue
St. Charles, IL 60174
Ph: 800-SENSOR2
Fx: 630/377-6495
Documents on Demand
1-800-736-7672 x3
www.systemsensor.com

System Sensor Canada

Ph: 905.812.0767
Fx: 905.812.0771

System Sensor Europe

Ph: 011.44.1403.276500
Fx: 011.44.1403.276501

System Sensor in China

Ph: 011.86.29.524.6253
Fx: 011.86.29.524.6259

System Sensor in Singapore

Ph: 011.65.273.2230
Fx: 011.65.273.2610

System Sensor- Far East

Ph: 011.85.22.191.9003
Fx: 011.85.22.736.6580

System Sensor- Australia

Ph: 011.613.54.281.142
Fx: 011.613.54.281.172